




Intended Uses:

SKYWALK architectural pavers are intended for creating beautiful rooftop patios, accommodating the unique needs of any project. Whether you require ADA-compliant pavers, LEED-certified pavers, solar ballast pavers or drain pavers, we design them all to meet your specific needs.

Manufacturing Process:

SKYWALK pavers are compressed with 460 tons of pressure utilizing a European hydraulic press that eliminates excess water and air. Precision molds ensure uniform size and texture, while allowing for a wide variety of sizes, colors and aggregates.

Standard Application:

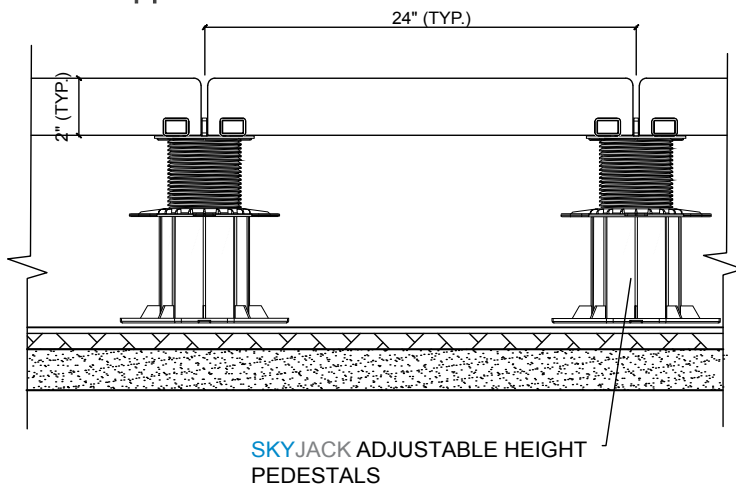

Sizes Available: 23-1/2" X 23-1/2" (standard)

11-3/4" X 11-3/4" - 12" X 36" - 23-1/2" X 35-3/8"

15-3/4" X 15-3/4" - 18" X 18" - 35-1/2" X 35-1/2"

17-5/8" X 23-1/2" - 24" X 24"

Compressive Strength:

Minimum of 8,500 PSI

Flexural Strength:

Minimum of 800 PSI

Density:

150 Pounds per Cubic Foot

Water Absorption Rate:

Less Than 5%

Freeze/Thaw:

No More Than 1% Loss of Dry Weight


**SKYWALK PAVERS by
skydeck usa**



DRAIN PAVER



ADA-CERTIFIED



BRICK-FACED



DIAMOND CUT



AGGREGATE

****Due to our precision engineering, we can manufacture SKYWALK pavers to meet any architectural or engineering specification.**