



skydeck

— usa —


rooftop patios. simply done.

skydeck usa porcelain catalogue




MONOCROMATICA | \$6/sqft



 3/4" thickness

Bone



US7938
23 1/3" x 23 1/3" rectified
60x60 cm



1100032
11 3/4" x 23 1/3" rectified
30x60 cm



Ash




US7937
23 1/3" x 23 1/3" rectified
60x60 cm



1100031
11 3/4" x 23 1/3" rectified
30x60 cm




Basalt



US7936
23 1/3" x 23 1/3" rectified
60x60 cm



1100030
11 3/4" x 23 1/3" rectified
30x60 cm

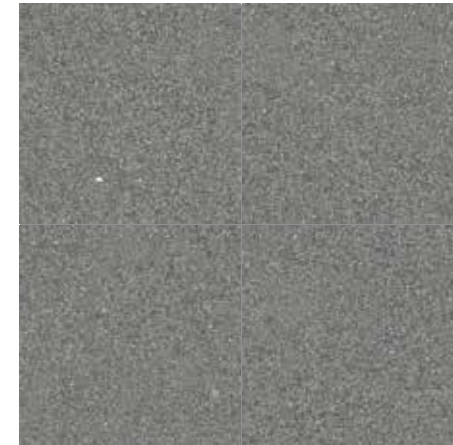


Sand



US7935
23 1/3" x 23 1/3" rectified
60x60 cm



1100029
11 3/4" x 23 1/3" rectified
30x60 cm

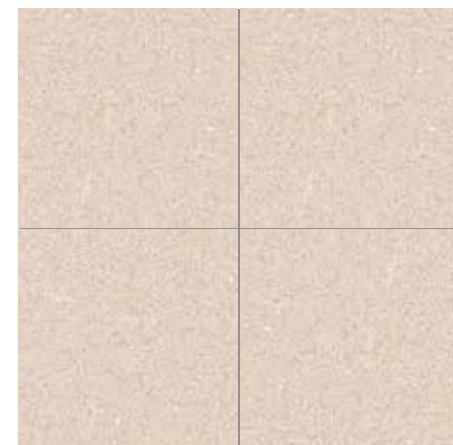


Cognac



US7934
23 1/3" x 23 1/3" rectified
60x60 cm



1100028
11 3/4" x 23 1/3" rectified
30x60 cm

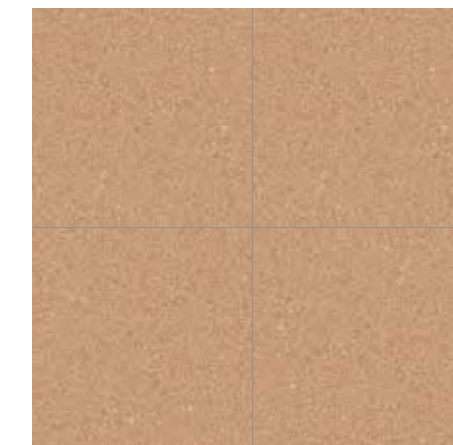

Leather







US7939
23 1/3" x 23 1/3" rectified
60x60 cm




1100033
11 3/4" x 23 1/3" rectified
30x60 cm



TERRAZZO | - \$6/sqft




 3/4" thickness

White Black



US7933	1100027
23 1/3" x 23 1/3" rectified	11 3/4" x 23 1/3" rectified
60x60 cm	30x60 cm

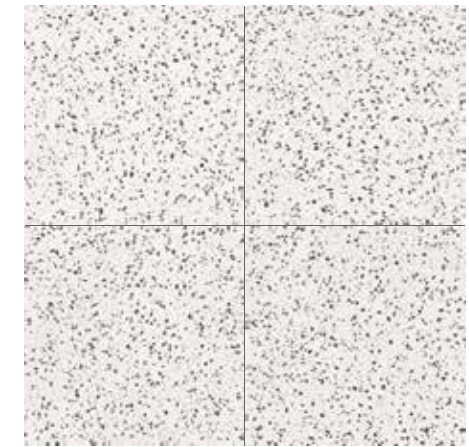

Grey Black



US7932	1100026
23 1/3" x 23 1/3" rectified	11 3/4" x 23 1/3" rectified
60x60 cm	30x60 cm



Charcoal




US7931	1100025
23 1/3" x 23 1/3" rectified	11 3/4" x 23 1/3" rectified
60x60 cm	30x60 cm



Cool White



US7929	1100023
23 1/3" x 23 1/3" rectified	11 3/4" x 23 1/3" rectified
60x60 cm	30x60 cm

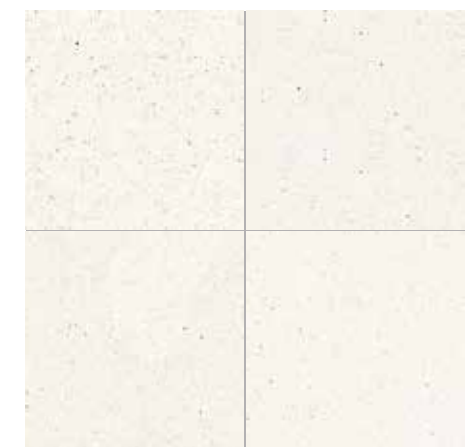

Cool Grey



US7930	1100024
23 1/3" x 23 1/3" rectified	11 3/4" x 23 1/3" rectified
60x60 cm	30x60 cm



COTTO - \$6/sqft



3/4" thickness



US7924
23 1/3" x 23 1/3" rectified
60x60 cm



1100022
11 3/4" x 23 1/3" rectified
30x60 cm



PENNSYLVANIA | Full Color Cleft Pattern



3/4" thickness

\$6/sqft




US7920
23 1/8" x 47 1/8" rectified
60x120 cm

\$6/sqft



US7916
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16/sqft



1100457
11 3/4" x 23 1/8" rectified
30x60 cm

\$7/sqft



US7918
11 3/4" x 11 3/4" rectified
30x30 cm

\$6.10/sqft



US7922
11 3/4" x 47 1/8" rectified
30x120 cm



**Cleft
Pattern**

PENNSYLVANIA | *True Blue Thermal Pattern*



3/4" thickness

\$6/sqft



US7921
23 1/8" x 47 1/8" rectified
60x120 cm

\$6/sqft



US7917
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16/sqft



1100458
11 3/4" x 23 1/8" rectified
30x60 cm

\$7/sqft



US7919
11 3/4" x 11 3/4" rectified
30x30 cm

\$6.10/sqft



US7923
11 3/4" x 47 1/8" rectified
30x120 cm




***Thermal
Pattern***

STONE | *Moonstone*



3/4" thickness

\$6/sqft




US7903
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16/sqft



1100013
11 3/4" x 23 1/8" rectified
30x60 cm

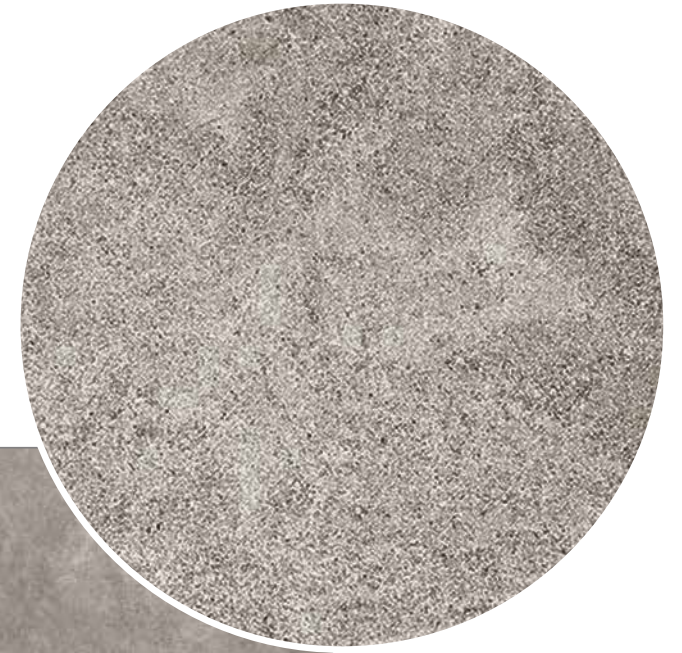

STONE | Creamstone



3/4" thickness

\$6/sqft



US7904
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16/sqft



1100014
11 3/4" x 23 1/8" rectified
30x60 cm

\$7/sqft



US7940
11 3/4" x 11 3/4" rectified
30x30 cm



ICON TRAVERTINE | Pearl



3/4" thickness

\$6/sqft



US7908
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16'sqft



1100015
11 3/4" x 23 1/8" rectified
30x60 cm



ICON TRAVERTINE | *River*



3/4" thickness

\$6/sqft



US7909
23 1/8" x 23 1/8" rectified
60x60 cm


\$6.16'sqft



1100016
11 3/4" x 23 1/8" rectified
30x60 cm



QUARTZITE | *Crystal White*

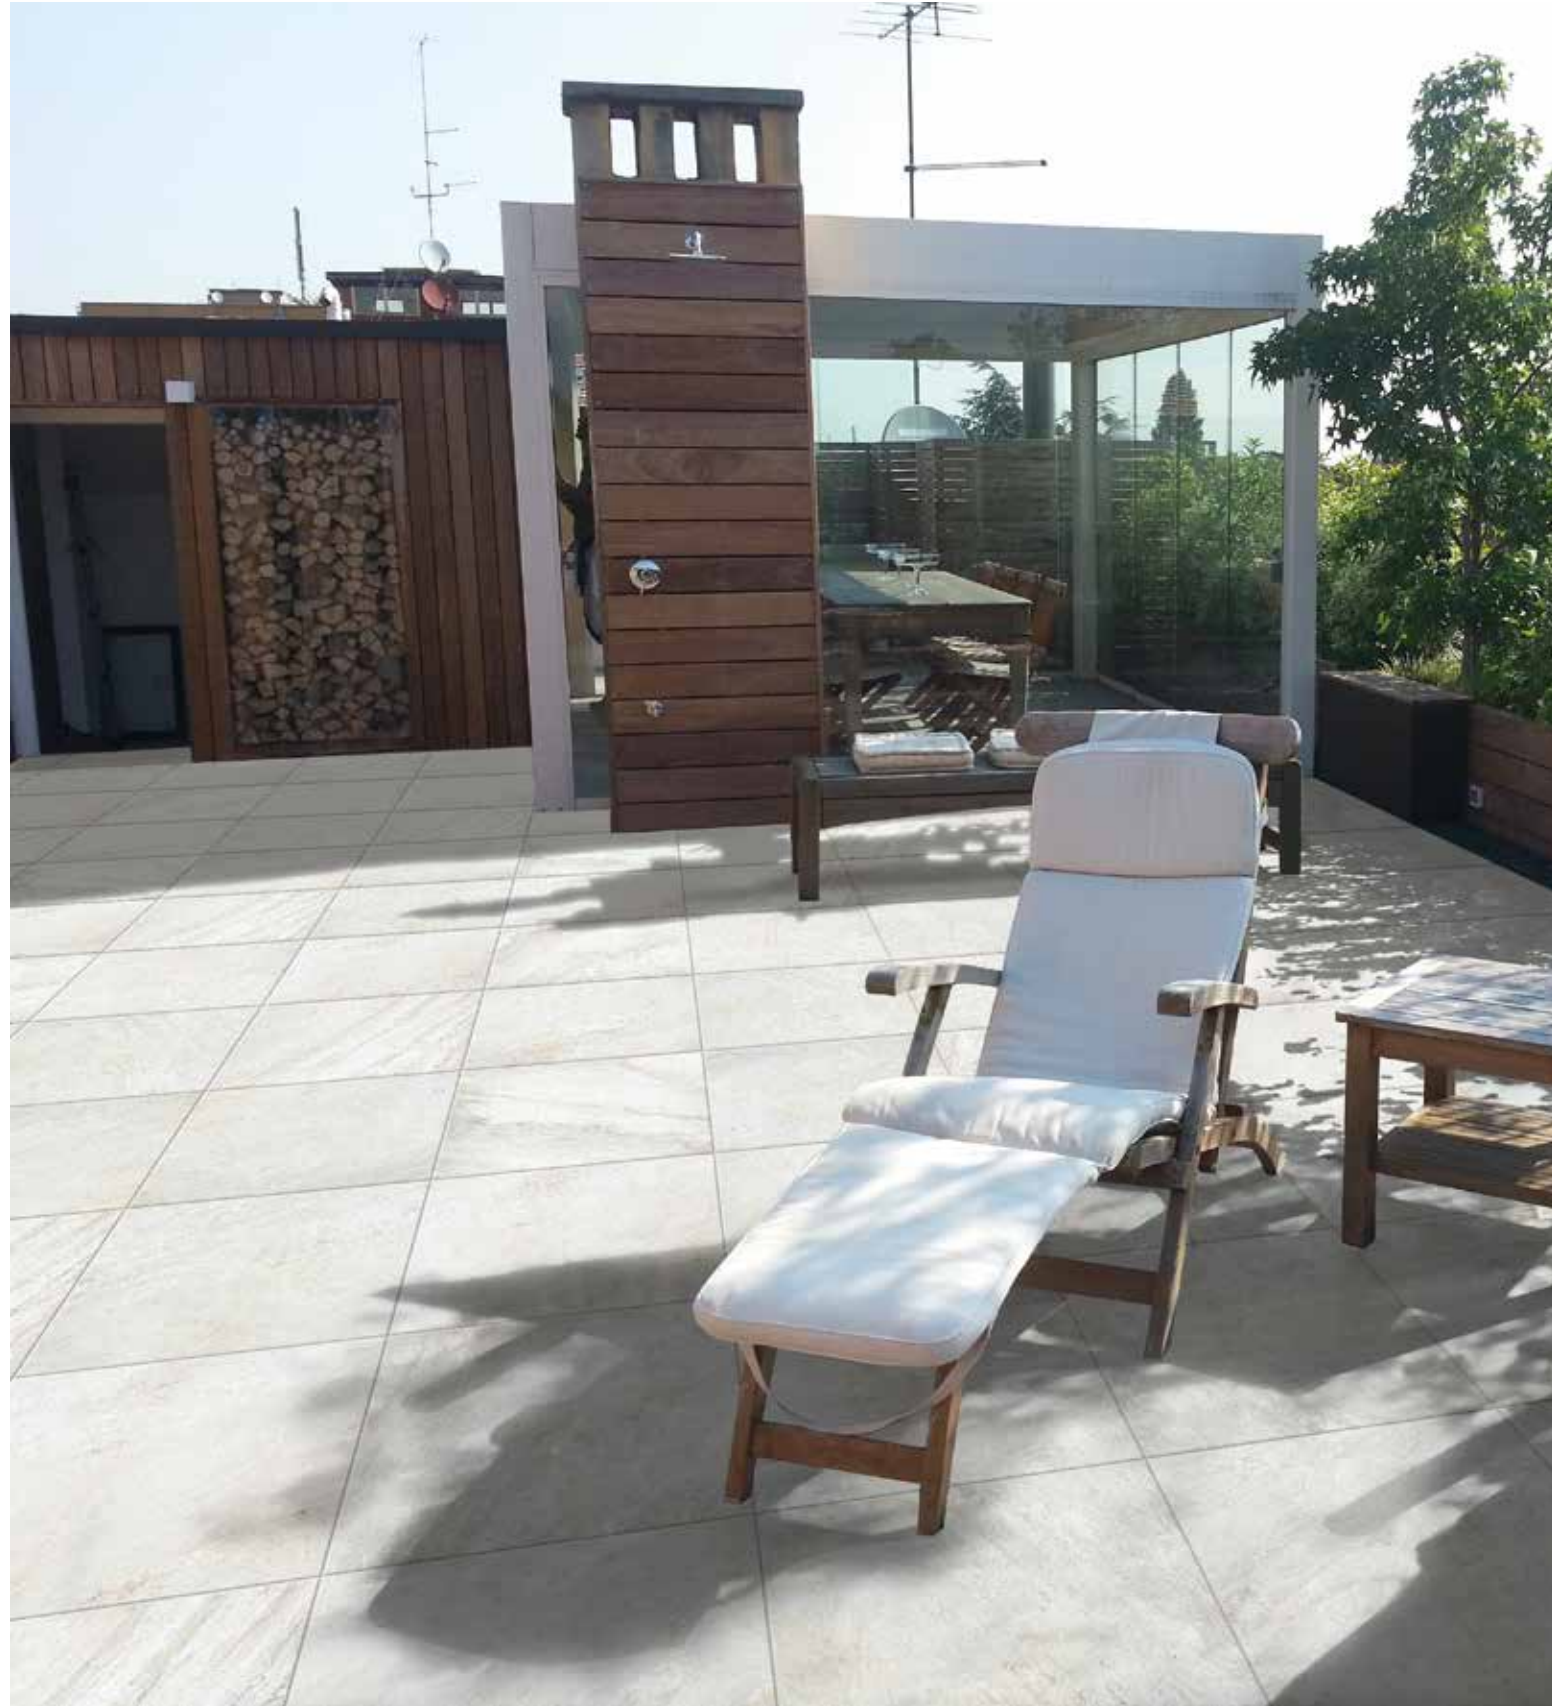

3/4" thickness

\$6/sqft



US7907
23 1/8" x 23 1/8" rectified
60x60 cm


\$6.16/sqft



1100017
11 3/4" x 23 1/8" rectified
30x60 cm



QUARTZITE | *Sandy Island*

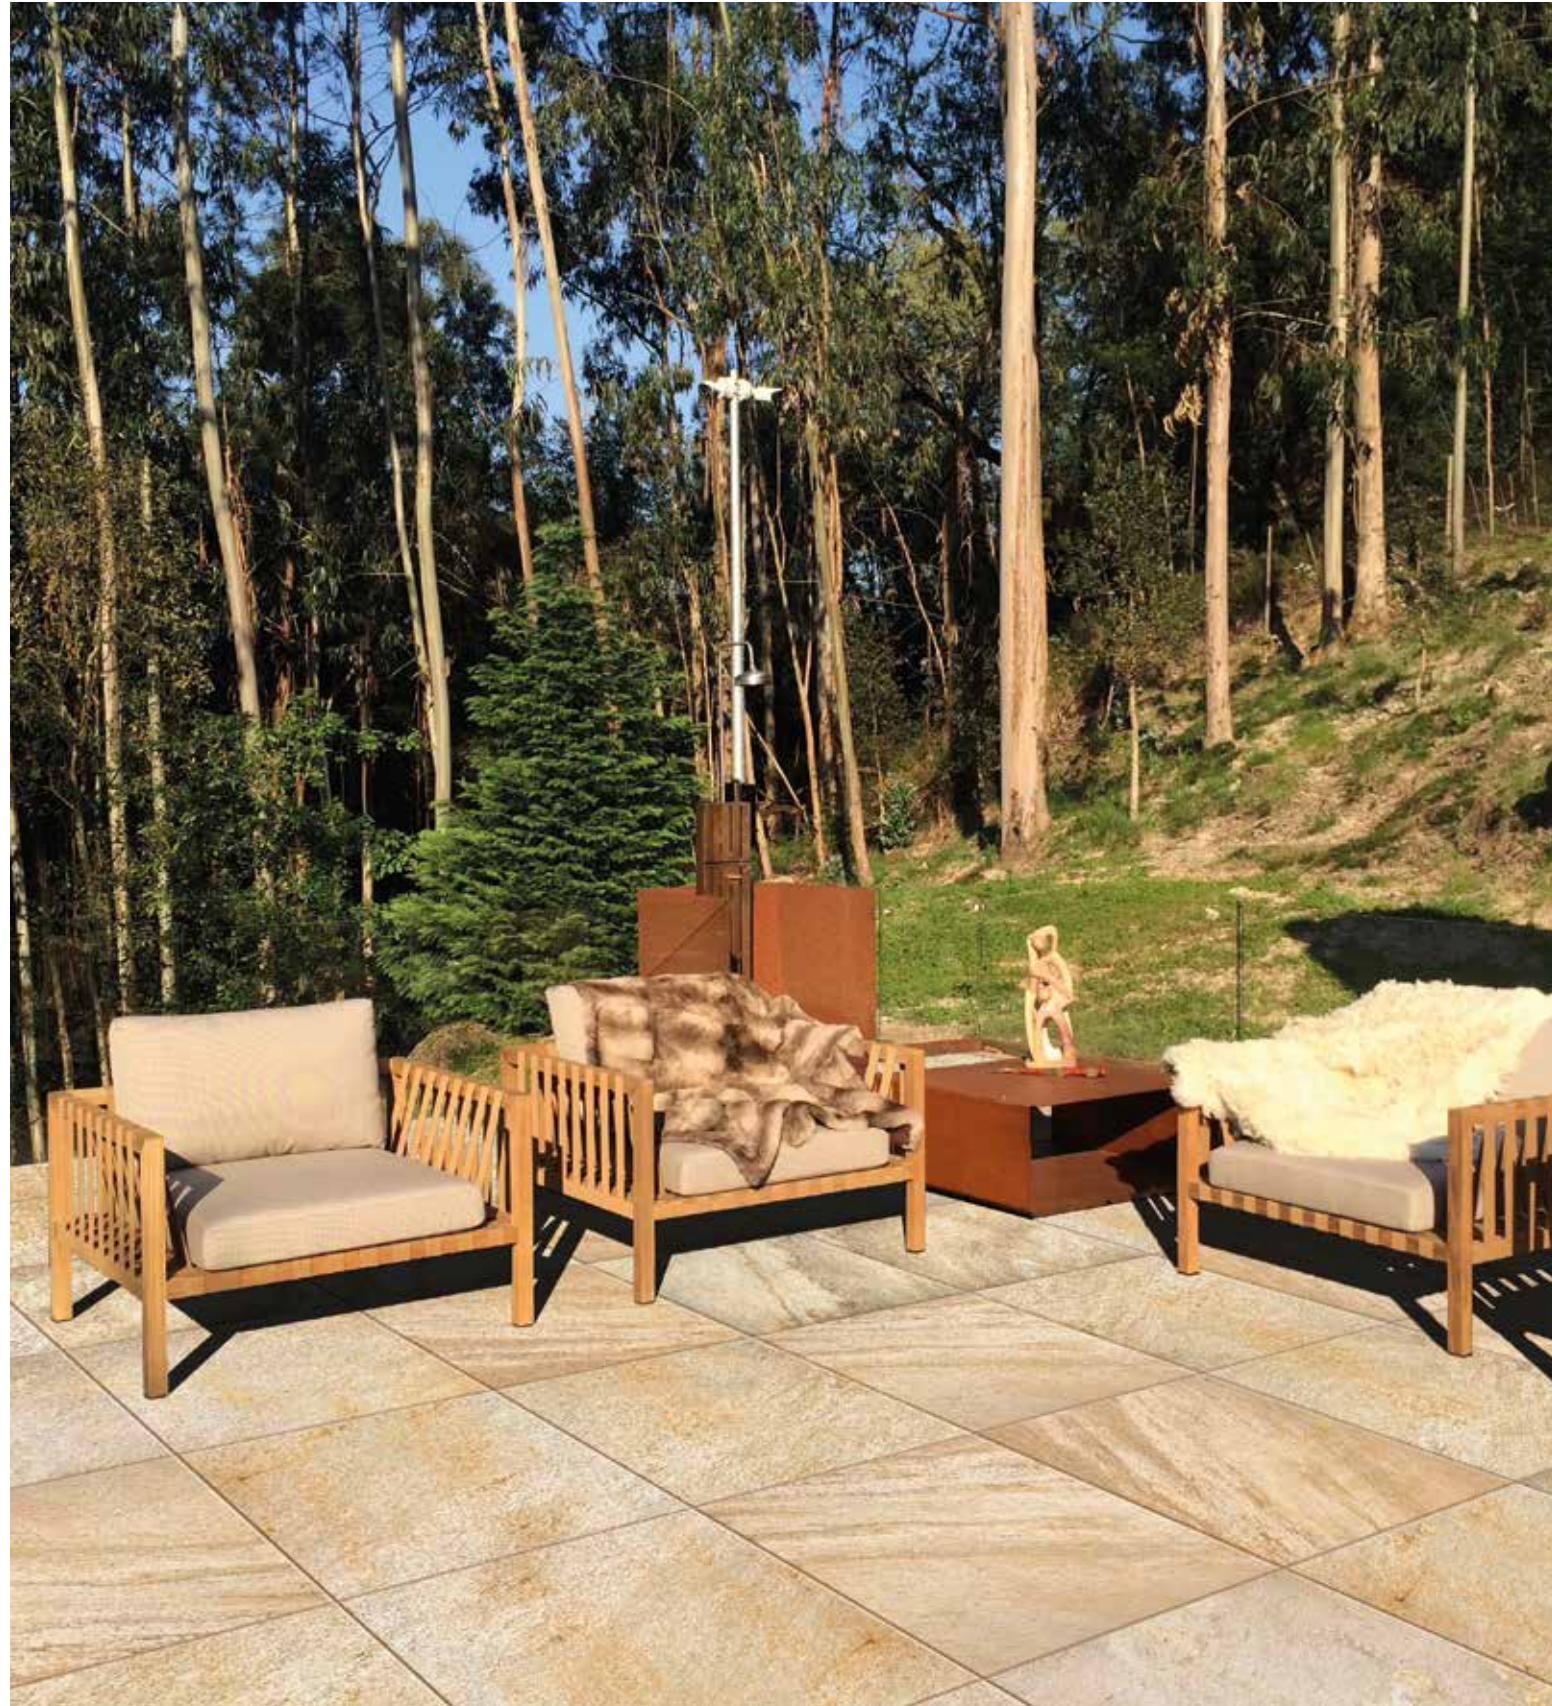

3/4" thickness

\$6/sqft



US7910
23 1/8" x 23 1/8" rectified
60x60 cm

\$6.16/sqft



1100018
11 3/4" x 23 1/8" rectified
30x60 cm




QUARTZITE | *Laguna*



3/4" thickness

\$6/sqft



US7915
23 1/3" x 23 1/3" rectified
60x60 cm



QUARTZITE | *Cloud*



3/4" thickness


\$6/sqft



US7914
23 1/8" x 23 1/8" rectified
60x60 cm




OCEAN STONE | *White Cool*

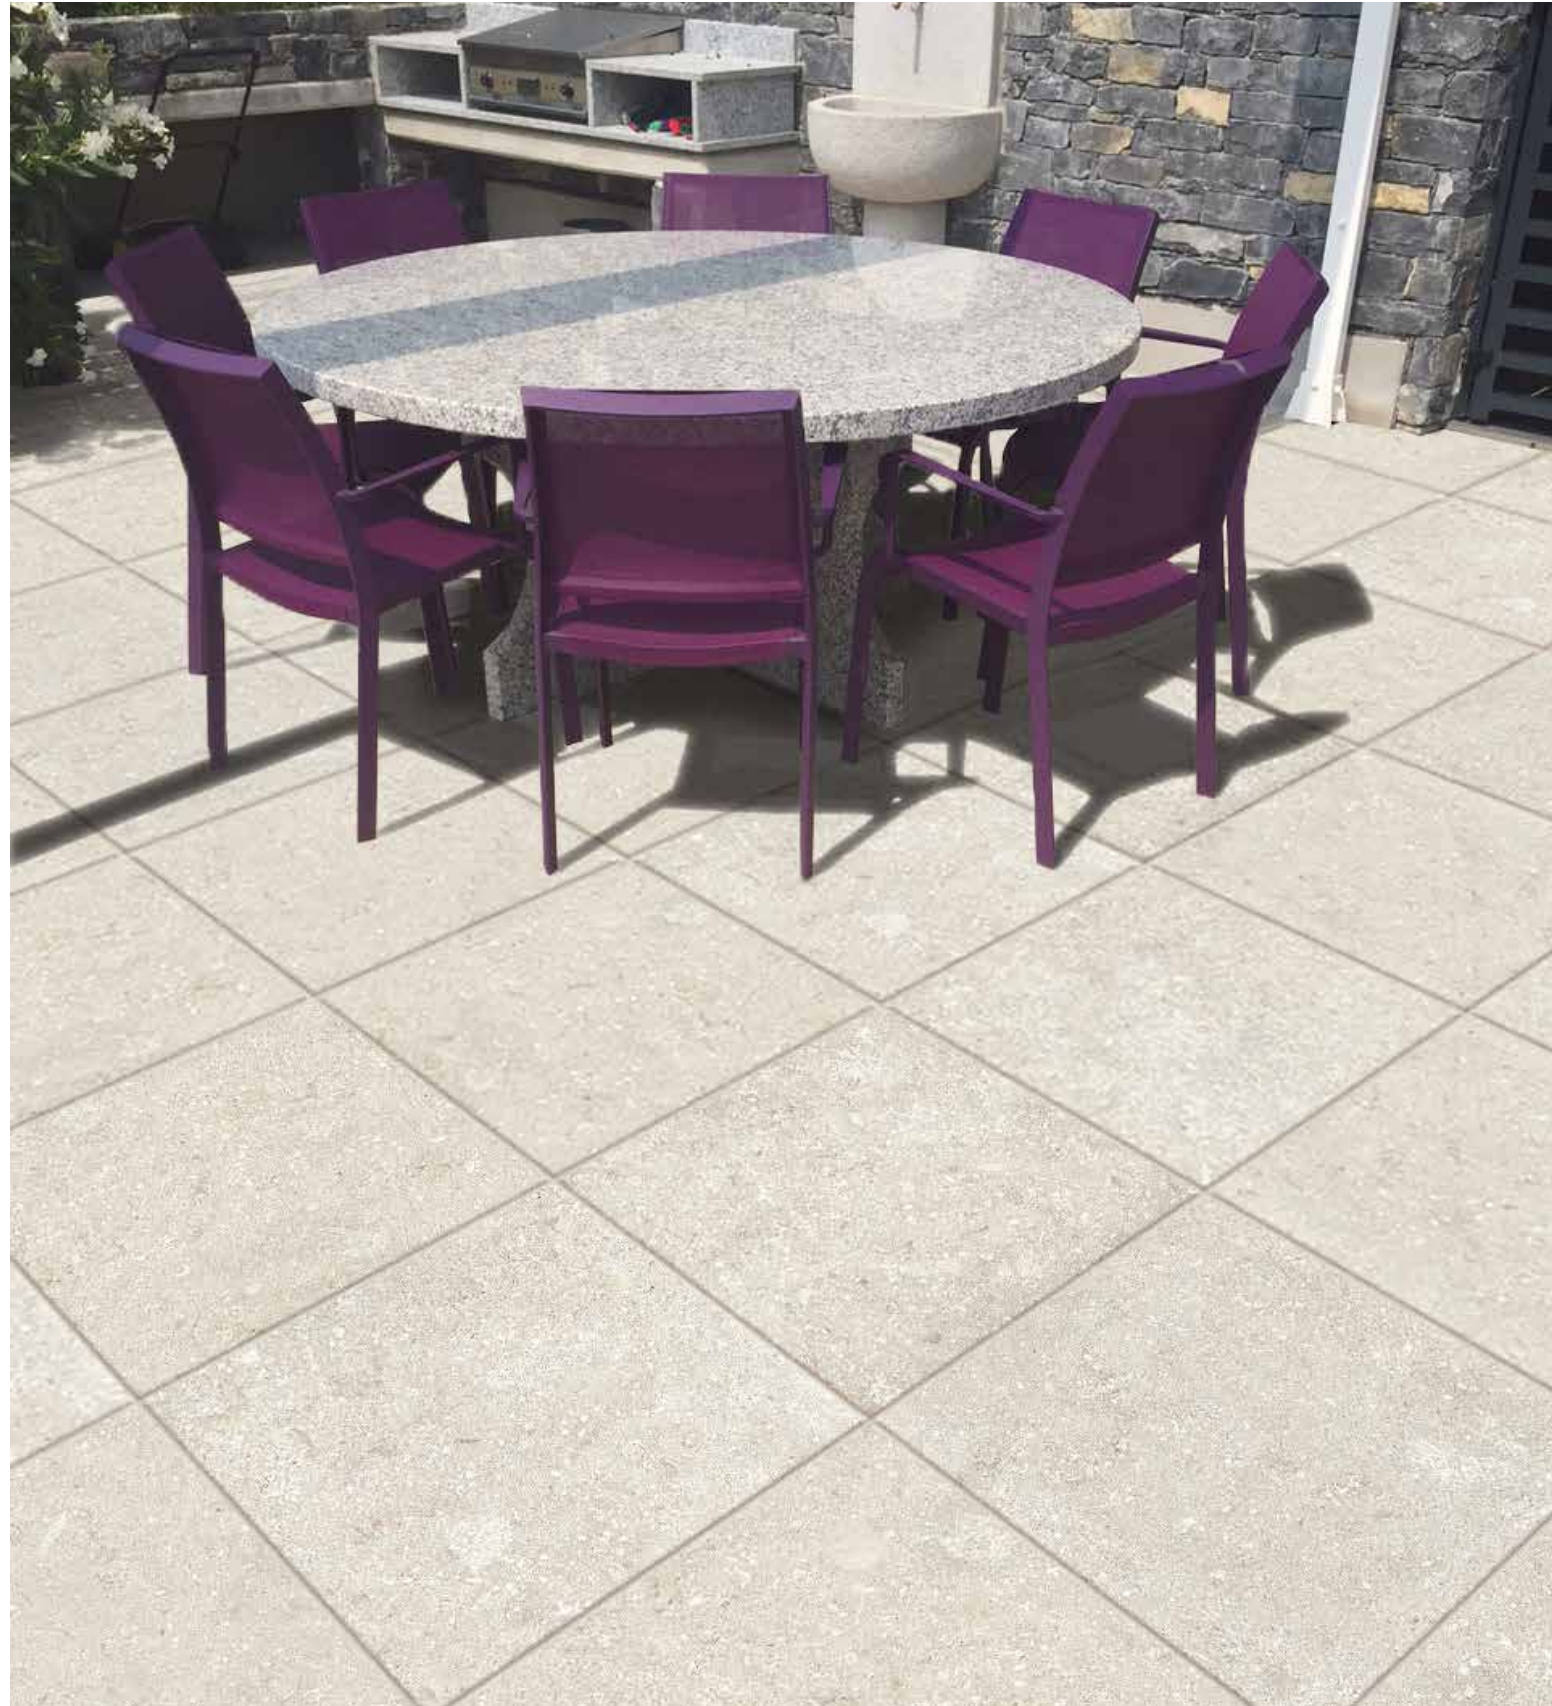

3/4" thickness

\$6/sqft



US7911
23 1/3" x 23 1/3" rectified
60x60 cm

\$6.16/sqft



1100019
11 3/4" x 23 1/3" rectified
30x60 cm




OCEAN STONE | *Black*



3/4" thickness

\$6/sqft




US7912
23 1/3" x 23 1/3" rectified
60x60 cm

\$6.16/sqft



1100021
11 3/4" x 23 1/3" rectified
30x60 cm

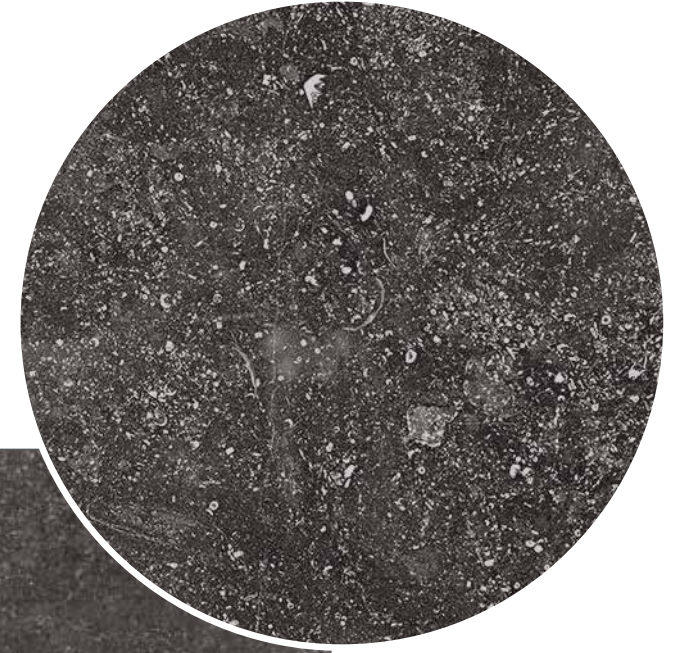

OCEAN STONE | *Tan*



3/4" thickness

\$6/sqft




US7913
23 1/3" x 23 1/3" rectified
60x60 cm

\$6.16/sqft




1100020
11 3/4" x 23 1/3" rectified
30x60 cm

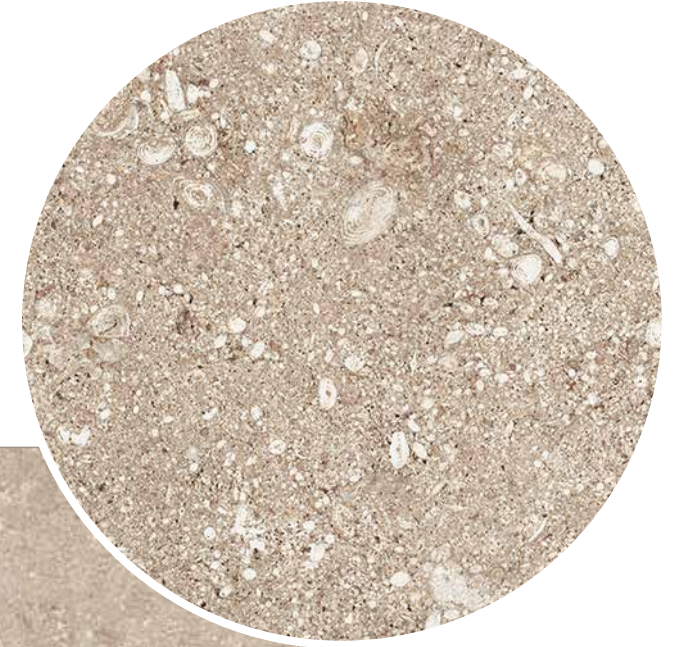

TEX WOOD | Grey



 3/4" thickness

\$6/sqft



US7900
23 1/3" x 23 1/3" rectified
60x60 cm



TEX WOOD | *Brown*



3/4" thickness

\$6/sqft



US7901
23 1/3" x 23 1/3" rectified
60x60 cm



TEX WOOD | *Ivory*



3/4" thickness

\$6/sqft



US7902
23 1/3" x 23 1/3" rectified
60x60 cm



TIMBER WOOD | *Teak*




3/4" thickness

\$6/sqft



US7905
23 1/3" x 23 1/3" rectified
60x60 cm



TIMBER WOOD | Ipe'



3/4" thickness

\$6/sqft




US7906
23 1/8" x 23 1/8" rectified
60x60 cm



SPECIAL PIECES |


DOUBLE BEVEL COPING

30x60 - 1 1/4" x 2 3/4"
Available in all colours.

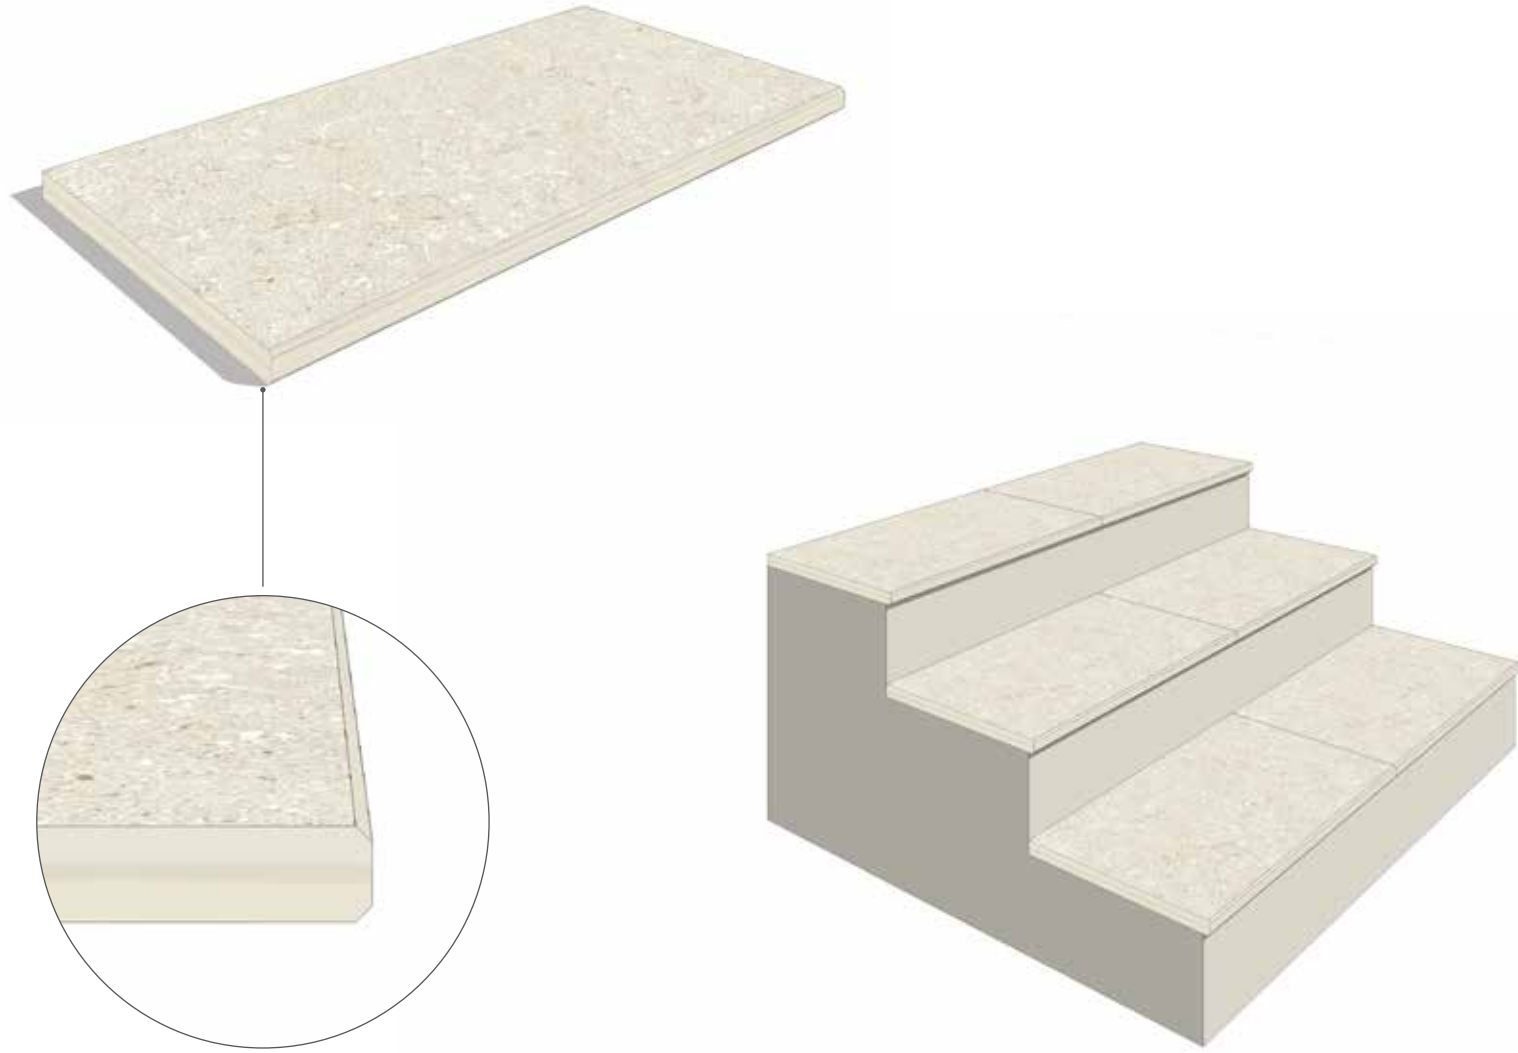

FULL BULLNOSE COPING

30x60 - 1 1/4" x 2 3/4"
Available in all colours.

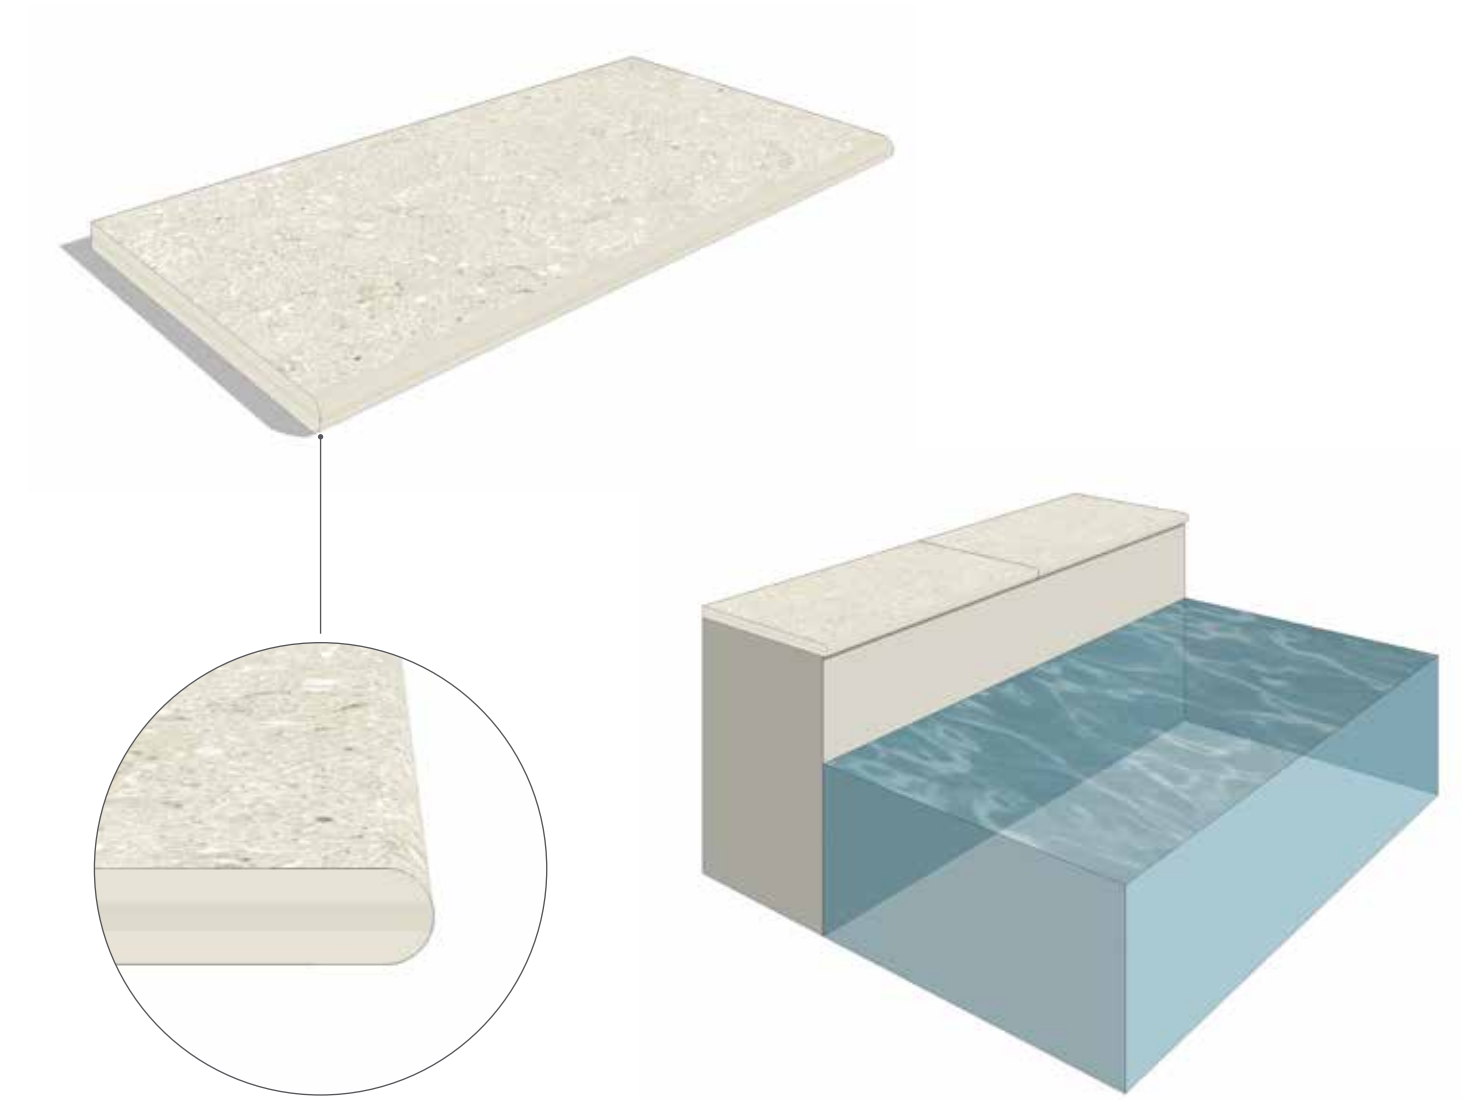

PACKAGING

2.0 MONOLITHIC RECTIFIED CERAMIC TILE	Thickness	Unit / Box	SqFt / Box	Boxes / Pallet	SqFt / Pallet	Weight / Box	Weight / M ²	Weight / SqFt	Weight / Pallet (included)	Pallet Size
23 1/2"x47 1/8"	3/4" - 20mm	2	15,5	16	248	153 lb	100 lb	9,3 lb	2454 lb	24"x 48"
11 3/4"x47 1/8"	3/4" - 20mm	4	15,5	16	248	153 lb	100 lb	9,3 lb	2406 lb	24"x 48"
23 1/2"x23 1/2"	3/4" - 20mm	2	7.75	36	279	72 lb	100 lb	9,3 lb	2670 lb	42"x 42"
11 3/4"x23 1/2"	3/4" - 20mm	4	7,75	40	310	72 lb	100 lb	9,3 lb	2955 lb	42"x42"
11 3/4"x11 3/4"	3/4" - 20mm	5	4,85	45	218	45 lb	100 lb	9,3 lb	2095 lb	42"x42"

TECHNICAL CHARACTERISTICS

STANDARS	CHARACTERISTICS OR PROPERTIES	COMPLIANCE WITH STANDARDS UNI EN 14411 G wASTM	DECLARED VALUE
ISO - 10545-3 ASTM - C 373-88	Water absorption	E <= 0.5 %	< 0.1 %
ISO - 10545-9 ASTM - C 484	Thermal shock resistance	Requested	Complies with standard
ISO - 10545-12 ASTM - C 1026	Frost resistance	Requested	Complies with standard
ISO - 10545-6 ASTM C - 1243-93	Abrasive wear	<175 mm ²	139 mm ²
ISO - 10545-2	Straightness / ASTM - C 485	+/- 0.75 % (+/- 1.8 mm)	Complies with standard
	Straightness / ISO - 10545-2	+/- 0.5 % (+/- 1.5 mm)	Complies with standard
	Thickness / ASTM - C 499	+/- 1.02 mm	Complies with standard
	Thickness / ISO - 10545-2	+/- 0.5 % (+/- 0.5 mm)	Complies with standard
	Length and width / ASTM - C 499	+/- 0.5 % (+/- 2.0 mm)	Complies with standard
	Length and width / ISO - 10545-2	+/- 0.6 % (+/- 2.0 mm)	Complies with standard
ISO - 10545-4 Bending strength in N (thickness >= 7.5 mm)	ASTM - C 648	>= 250 LBF Average	>= 225 LBF Individual
	ISO - 10545-4	>= 1300 Newton	> 13000
ASTM - C 650	Chemical resistance	As reported	Resistant
ISO 10545-14	Resistance to stain	-	5
ISO 10545-13	Chemical resistance	UB min.	UA ULA UHA
ISO 10545-8	Coefficient of linear thermal-expansion	-	$\alpha=6.3 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$
ISO 10545-5	Impact resistance	-	0.88
EN 12825	Static load	-	Centre 9.6 Kn Centre point of sides 6.5 Kn Diagonal 8.19 Kn (CLASSE 3)
	Dymanic laod capacity - hand object impact test	-	Test not passed
	Dymanic laod capacity - soft object impact test	-	Test passed
EN 1339	Bendind strength - breaking force in N	Kn 14.38	classe 14
ENV 12633	Slip resistance	> / = CL1	CL 2
DIN 51130	Slip resistance	-	R11
DIN 51097	Slip resistance	-	A + B + C min.
DM 236/89 B.C.R.A.	Slip resistance	-	> 0.40
Static coefficient of friction ASTM 1028-07 BOT 3000 Dynamic coefficient of friction (sectio n 9.6 ANSIA 137.1 2012)	Slip resistance	-	> 0.60 WET > 0.60 DRY
			>= 0.42
EN 13501-1	Fire resistance	-	A1 - A1 FL
* TAS 108 FLORIDA BUILDING CODE WIND UP LIFT TEST	3/4" thick 24"x24" porcelain installed on fixed height pedestals and 45° wind angle was blow of at	-	130 mph with no parapet 150 mpt with 12" high parapet