




skydeck

usa

rooftop patios. simply done.

skydeck usa product catalogue

Cori Eagan



Tier 1 - Diamond Cut Gray



Tier 2 - Standard Aggregates



Almond



Ginger



Meteor



Wheat



Light Gray



Speckled Gray



Medium Gray



Dark Gray



Salmon




Sedona



Merlot



Speckled Brick



Property	Value	Test Methods
----------	-------	--------------

Pavers Hydraulically Pressed Pavers

ASTM C936

Composition Aggregates & Cement
Limestone, Water, Sand
No Chemicals or Agents

ASTM C936

Unit Weight 90 pounds

ASTM C936

Concrete Properties

Compressive Strength 8,500 psi

ASTM C140/C1491

Flexure (minimum)

Water Absorption Less than 5%
(maximum)

ASTM C140


Freeze/Thaw 50 Cycles
Resistance

ASTM C67

Wet DCOF .80
(dynamic coefficient
of friction)

ANSI A137.1

PAVER SIZE AND THICKNESS OPTIONS		
SIZE	THICKNESS	
ACTUAL SIZE	MINIMUM	MAXIMUM
11-3/4" x 11-3/4"	1-1/4"	3"
11-3/4" x 23-1/2"	1-1/4"	3"
11-3/4" x 36"	1-1/2"	3"
12" x 36"	1-1/2"	3"
14-1/2" x 14-1/2"	1-1/2"	3"
14-5/8" x 29-5/8"	1-1/2"	3"
15-3/4" x 15-3/4"	1-1/2"	3"
15-3/4" x 23-5/8"	1-1/2"	3"
17-5/8" x 17-5/8"	1-1/2"	3"
17-5/8" x 23-1/2"	1-1/2"	3"
17-5/8" x 35-3/8"	2"	3"
18" x 18"	1-1/2"	3"
23-1/2" x 23-1/2"	1-1/2"	3"
23-1/2" x 29-1/2"	2"	3"
23-1/2" x 35-3/8"	2"	3"
23-1/2" x 47-1/2"	2.5"	3.5"
23-3/4" x 23-3/4"	1-1/2"	3"
24" x 24"	1-1/2"	3"
29-1/2" x 29-1/2"	2"	3"
29-3/4" x 29-3/4"	2"	3"
35-1/2" x 35-1/2"	2-1/2"	3"
47-1/2" x 47-1/2"	2-1/2"	3.5"

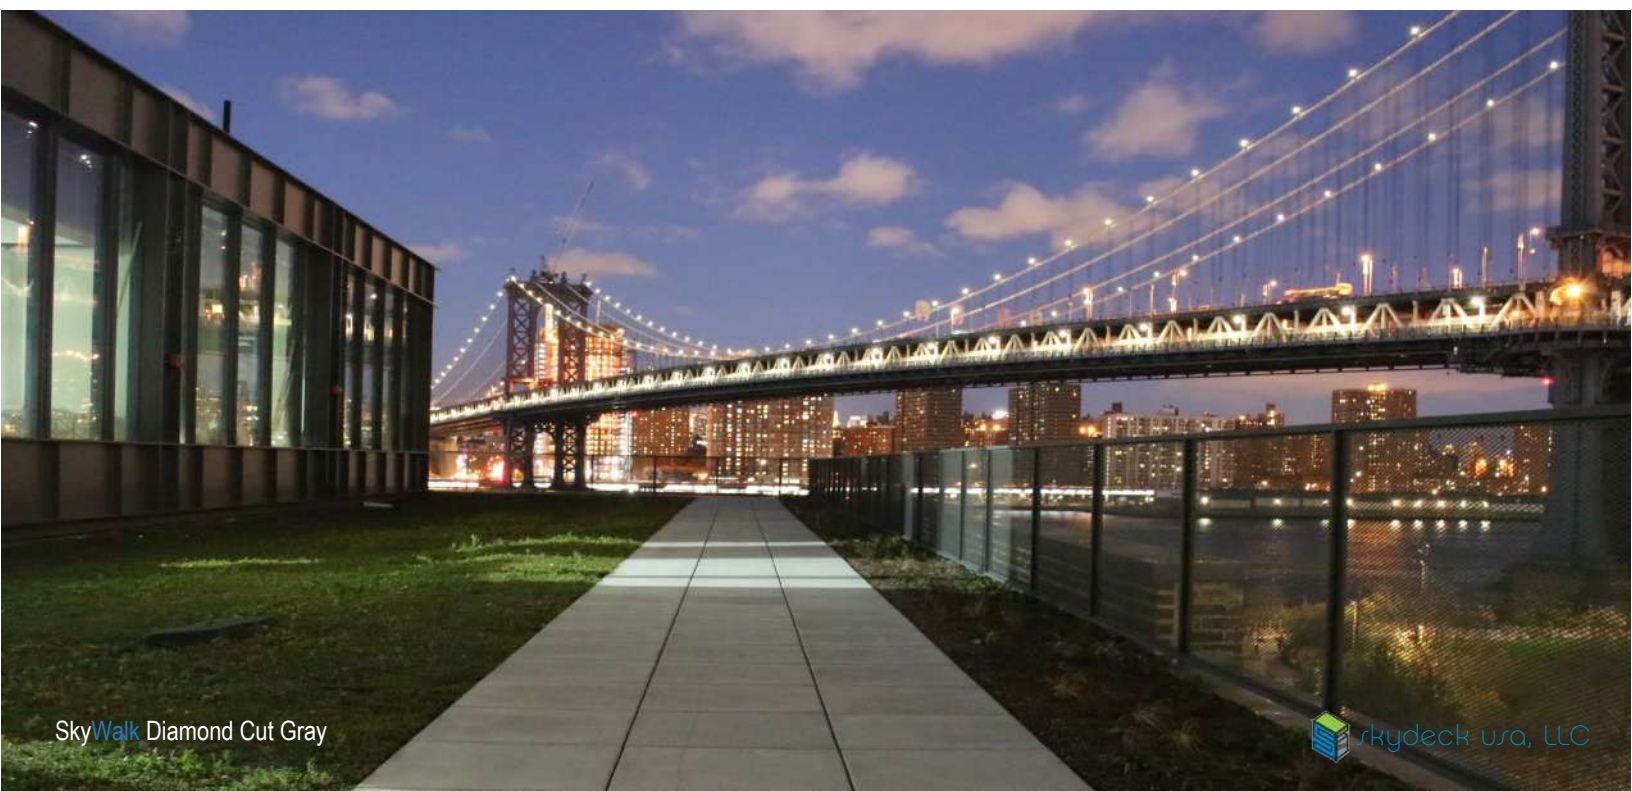




SkyWalk Light and Medium Gray

SkyWalk Dark Gray



Skywalk Concrete Pavers Provide Many Benefits Including:

- Durable, long-lasting product
- Minimal maintenance required
- Beautiful, architectural style
- Lengthens roof membrane lifespan by stopping harmful UV rays
- Seamlessly integrates with green roof features
- Roof components below pavers are easily accessible
- Utilizes previously unusable space




SkyWalk – Sedona, Speckled and Dark Gray

Why Use SkyJack Pedestals?

- They are the **safest, fastest and simplest** way to create a rooftop patio
- **Compatible with most flooring options**, including concrete pavers, deck tiles, porcelain and framed wood or composite decks
- **Create a level patio** on top of roofs with up to a 7% slope
- Skyjack pedestals rest on top of the roof without penetrating it to **protect the roofs waterproof integrity**
- They ensure uniform spacing between pavers to **allow water to flow unimpeded** to the drains below
- Smooth bottom ensures that rough concrete or wood materials **will not damage the roofing membrane**
- Can be installed to **accommodate the specific warranty** requirements of virtually any roofing system
- Pavers can be **quickly and easily removed** to access the roofing system for inspection, service and leak repair
- SkyJack Pedestal System helps to protect the roof from UV, hail and wind damage and can **double the life expectancy of the roof** beneath

skyjack pedestals

fast. simple. economical.



[*Click here to view our pedestal intro video](#)



skyjack pedestal sizes



SD-XXS
3/8"-5/8"
Adjustable
Pedestal



SD-XS
5/8"-1.25"
Adjustable
Pedestal



SD-S
1.25"-1.75"
Adjustable
Pedestal



SD-M
1.75" - 2.95"
Adjustable
Pedestal



SD-L
2.95" - 6"
Adjustable
Pedestal



SD-XL
5.9"-13.75"
Adjustable
Pedestal



SD-XL + SD-XL-EXT
13.75" - 21.75"
Adjustable
Pedestal

skyjack pedestal accessories



1/16" Rubber Shims ensure tiles are flush at each corner of the pedestal



8" Extender to add height to SD-XL pedestal. Stack up to 3 extenders for pedestal heights up to 38"



Self-Leveling Heads accommodate slopes up to 7% and simply snap on top of any pedestal SD-01 through SD-04



Joist Adapters allow a deck joist to be screwed onto the pedestal for building elevated wood or composite decks



skydeck
— usa —

SKYJACK PEDESTAL TECHNICAL DATA

Intended Uses:



SKYJACK adjustable pedestals are used to support raised rooftop terraces to create level patios on top of roofs that slope up to 7% taking once wasted rooftop space and making it a showcase space for any building. SKYJACK adjustable pedestals can also help eliminate more expensive patio supports like steel or wood frames with a weight bearing capacity of up to 2,150 lbs. per pedestal.

Application:

SKYJACK pedestals are uniquely designed to achieve perfectly level patios with the easy twist of our screw ring. Set up your laser level, place pavers or decking on top of the pedestals and twist until level. Simple, easy and perfect results every time.


Calculating # of Pedestals ([click here for an automatic product calculator](#))

1. Calculate the total # of pavers (ie - 46 pavers)
2. Calculate the total # of pavers needed around the perimeter and divide by the width of the paver (typically 2') (ie - 26 - 2'x2' pavers, so $26/2 = 13$)
3. Add the totals together ($46 + 13 = 59$)
4. Add 5% for waste ($59 * .05 = 2.95$)
5. $59 + 3 = 62$ pedestals needed



****SKYJACK pedestals can be used with any size or shaped materials including decking and concrete pavers. Simply remove spacer tabs and re-position in the holes that provide appropriate spacing**

SKYJACK adjustable pedestal system by skydeck usa

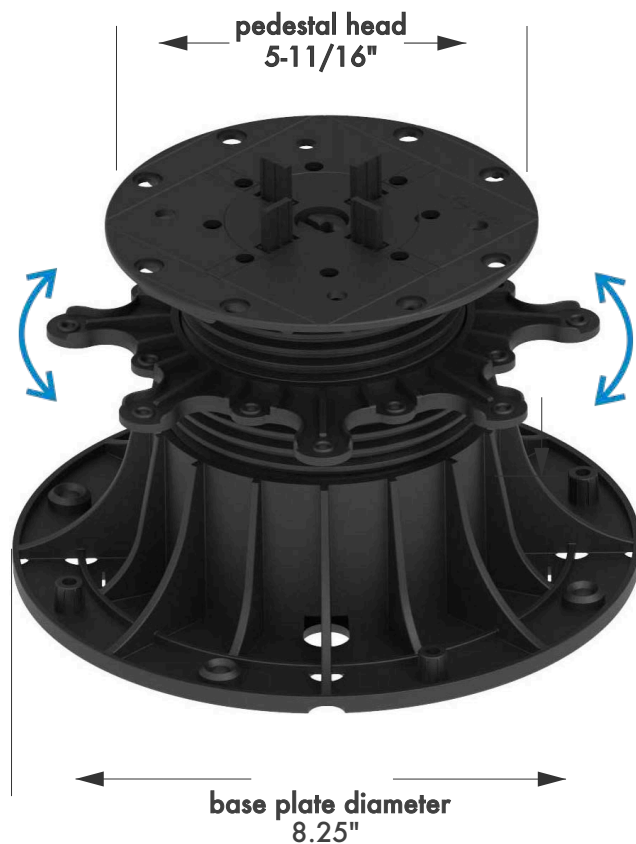

- 1 wide, stable base
- 2 screw ring for height adjustment
- 3 head with screw
- 4 removable spacer tabs

Material: Fully Recyclable High Density Copolymer Poly Propylene (HDCPP)



Temp. Range:

-20 to 200 degrees farenheit

Weight Capacity:

2,150 lbs per pedestal

Atmospheric Conditions:

Resistant to UV Radiance, Aging and Decay



SD-XXS - 3/8"-5/8"



SD-XS - 5/8" - 1.25"



SD-S - 1.25"-1.95"



SD-M - 1.95" - 2.95"



SD-L - 2.95" - 6"




SD-XL - 6" - 13.75"




SD-XL-EXT - 8" Extender


skywalk paver installation on pedestals

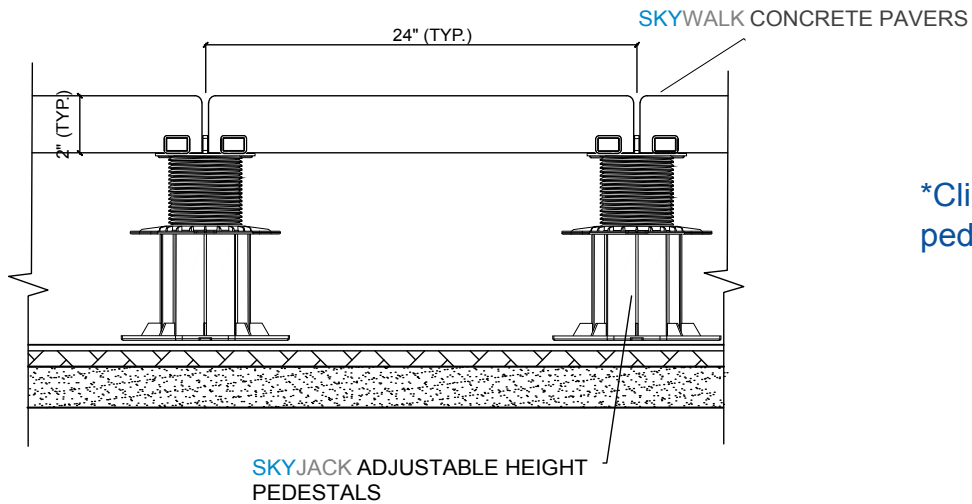


[*Click here to view our pedestal installation video](#)

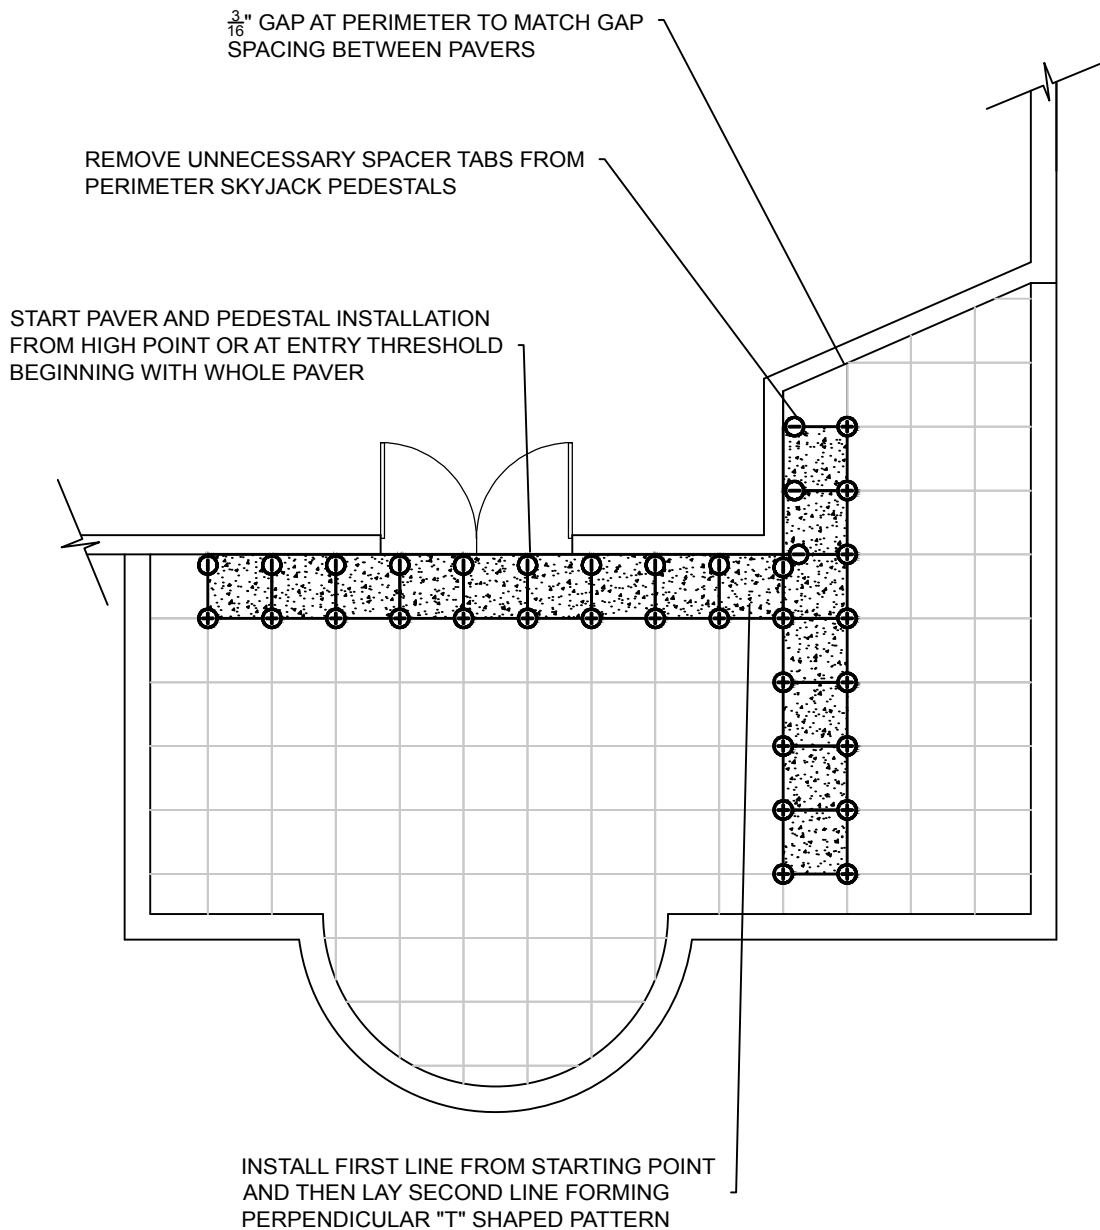

skywalk paver installation on pedestals

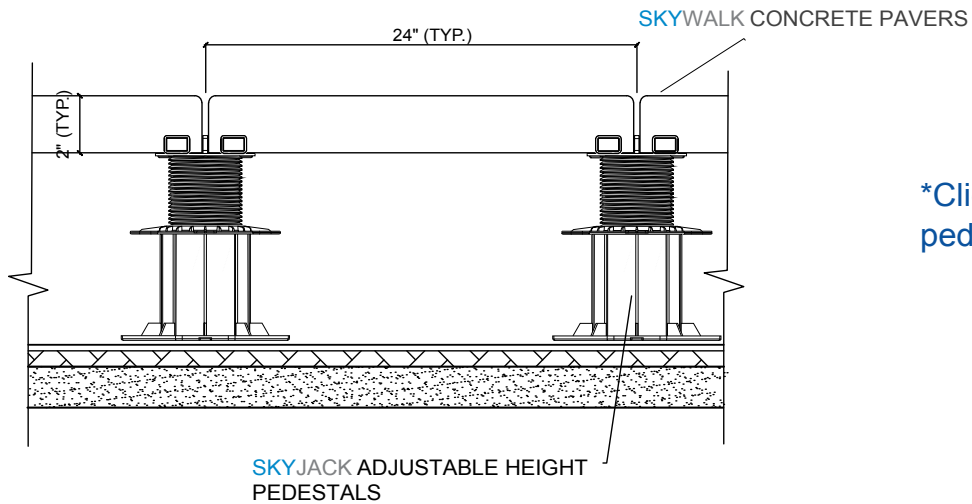

[*Click here to view our pedestal installation video](#)

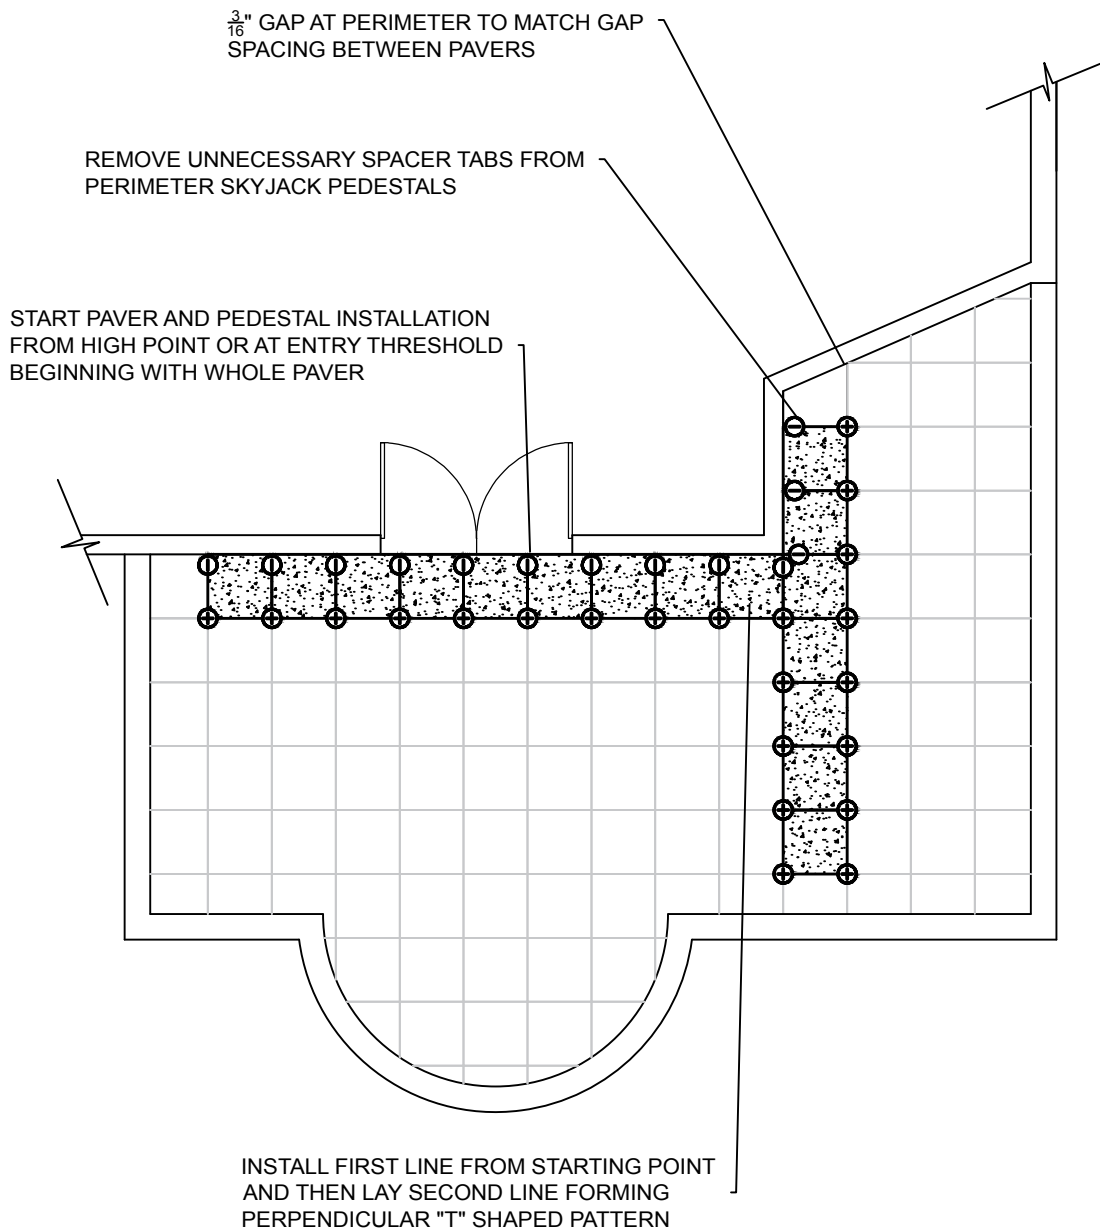



Structural Ipe wood deck tiles are 24" x 24" (nom.) prefabricated panels of 13/16" Brazilian hardwood slats screwed to three solid wood support battens with stainless steel screws. This results in a tile with exceptional strength, durability and resistance to flexing.

Structural Ipe wood tiles are specifically designed to be used with adjustable height pedestals for construction of elevated decks on rooftops or decks over sloping or uneven surfaces.

Alternatively, the tiles can be laid over existing concrete using fixed height spacers to lift the tiles off the surface and ensure good drainage.

Structural Ipe wood tiles can be used for most commercial or residential applications including rooftop decks, elevated terraces, plazas, and other large exterior spaces.

Our structural Ipe wood tiles are exclusively constructed from Brazilian hardwood, not just because of its exceptional durability and hardness, but because of its stability across a broad temperature and humidity range and resistance to twisting and warping.



CHARACTERISTICS OF BRAZILIAN HARDWOOD

- Highly resistant to termites, decay and mold
- Very hard and dense
- Wear resistant and scuff resistant
- Class A fire rating
- High bending and shearing strength
- Resists warping and twisting
- Weathers without splintering
- Lower maintenance than less dense species

SPECIFICATIONS



skydeck
— **USA** —
Rooftop Patios. Simply Done.

Tile size	23 7/8 in x 23 7/8 in
Covered area	24 in x 24 in
Tile height	1 11/16 in
Wood thickness	13/16 in
Slats per tile	8
Width of slats	2 7/8 in
Slat spacing	3/16 in approx.
Ends & sides finish	S4SE4E (radius 1/8 in)
Tile weight	23.5 lbs
Surface finish	Ends waxed with paraffin, slats with machined finish, and wood not coated with oil
Common name	Ipe
Botanical name	Tabebuia sp.
Color	Typically reddish brown color, but can vary from olive brown to blackish, often with lighter or darker striping
Grain	Fine to medium texture, grain always interlocked, sometimes very highly oily looking
Density @ 12% moisture	1050-1180 kg/m ³
Durability	Class A
Fire rating	Class A
Hardness (Janka)	3680 (very hard)
Resistance to decay and insect attack	Resistant to attack by decay fungi and termites — Not resistant to marine borers
Modulus of rupture	170 MPa
Modulus of elasticity	21 GPa
Maximum crushing strength	94 MPa
Shrinkage	7% tangential, 6% radial — 1.2 tangential/radial shrinkage ratio

INSTALLATION



skydeck
— **USA** —
Rooftop Patios. Simply Done.

RECEIVING THE PRODUCTS

Materials should be placed in a shaded location and unwrapped immediately upon arrival to the job site. Place spacers between the tiles to allow airflow while they acclimate to the climate and humidity level in the location where they'll be installed. Tiles and planks should be left to acclimate for 7-10 days prior to installation. Natural shrinking should be expected as the wood ages.

INSTALLATION ON ADJUSTABLE PEDESTALS

For installation on adjustable pedestals, it is very important that the structural integrity of the tile is maintained when cutting edge tiles. This may require relocating one (or two) of the support battens and re-attaching these to the slats from the underside of the tile. It may also be necessary to drill and countersink additional holes when re-inserting screws. Any time a cut is made, the cut edge must be immediately sealed with hardwood end sealant to ensure no moisture can be absorbed into the tile. Be careful not to allow the edge sealant to get on the visible surface of the tile as it may change the color.

It is also important that an adequate number of pedestals are used around the perimeter of the paved area, and that the perimeter is bounded by a low wall or some other restraining structure to prevent the tiles from moving.

INSTALLATION ON GRADE

If installing solid wood pavers over a firm substrate such as concrete, we do not recommend laying them directly on the substrate, for the following reasons:

- If wood is allowed to remain in contact with water for extended periods, it may result in some swelling of the bearers and possible temporary warping or twisting of the wood slats.
- Unless the tiles are all laid parallel to the slope (and not in an alternating checkerboard pattern), the bearers on the underside will prevent water flowing freely underneath the tiles.
- If the substrate is slightly uneven, the pavers could "rock" on the surface, or one or more of the edges may protrude, creating a potential tripping hazard

For best results we thus recommend laying the tiles on fixed height HDPE pedestals (as low as 1/2" elevation) installed at each corner.

REQUIRED WAXING AND SEALING

Our structural Ipe wood tiles are supplied without any factory applied oil coating. Any cut edges must be sealed with hardwood edge sealant immediately upon installation. Additionally, we strongly recommend that tiles are coated with a high quality decking oil as soon as practical after installation to maintain the attractive color of the wood and reduce natural shrinking and cracking and reducing the rate at which the wood will weather naturally to a silvery grey color.



MAINTENANCE



skydeck
— **USA** —
Rooftop Patios. Simply Done.

Our structural wood tiles are constructed exclusively with Brazilian hardwood, which is noted not only for its stability in service but also its long life, hardness, excellent weathering properties and resistance to insect attack. Therefore the tiles can be expected to maintain their attractive appearance over a long period with minimal ongoing maintenance.

APPEARANCE

Brazilian hardwood typically exhibits variation in both color and grain which can vary both from tile to tile and within the individual slats of a single tile. These variations add to the character and overall appearance of the finished project.

STORAGE

If the tiles have been supplied on a pallet with stretch wrapping, all the plastic wrapping should be removed and the pallet left in a shaded or covered position out of direct sunlight until the tiles are installed.

SEALING

As supplied, the wood tiles do not have any sealer or decking oil applied to the surface. However a wax is applied at the ends of the slats to minimize slight cracking or checking. An Ipe wax or edge sealant must be applied to any cut edges of the Ipe to prevent warping and cracking from moisture. Be careful not to apply any sealant to the visible surface of the tile as it may create a visible stain.

We always recommend applying a high quality hardwood oil sealer to the top surface of the tiles as soon as practical after installation which can not only reduce the rate of fading but can to some extent help to mitigate loss of moisture on the top of the wood slats which can minimize small cracking and splitting. Note that a small amount of cracking and splitting can be expected as part of the natural weathering process.

MAINTAINING TILE COLOR

The rate at which the wood color fades depends largely on the degree of exposure to direct sunlight, the climatic conditions and the frequency at which any preservative treatments are applied (ie: Ipe tiles will fade naturally to a silvery grey color if exposed to UV in sunlight).

To slow this natural fading effect and to keep the appearance of the tiles in their optimum condition, as soon as convenient after installing the tiles, we strongly recommend a good quality decking oil is applied with a brush or roller. Decking oils which contain trans-oxide pigments or other proprietary UV absorbing or reflecting compounds and have a high solids content are preferred for longer term results and extended periods between applications of the decking oil/sealant. These specialized products will help maximize the durability, beauty and value of your deck tiles and assist in maintaining the original wood color as long as possible. Some proprietary products will also provide additional protection against mold and mildew.



PERIODIC CLEANING

From time to time, it may be necessary to use a commercial cleaning product to both clean the surface of the deck and kill mold spores. Deck brightening products may also be used, providing you carefully test the product in an inconspicuous area to ensure that it will achieve the results you require.

PRESSURE WASHING

A pressure washer may also be used to remove any built-up of dirt, mold or mildew from the surface of the tiles. Although Ipe wood is an exceptionally hard and dense species, we recommend that you first test the pressure washing on an inconspicuous area.

skywalk turf installation on fiberglass grates

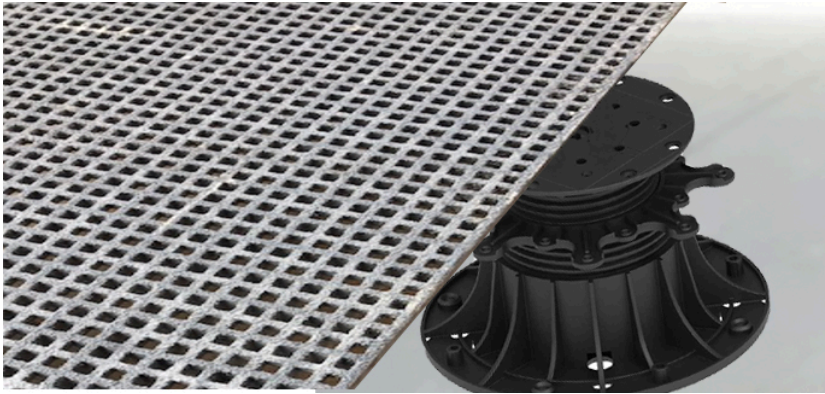

Skywalk Indoor/Outdoor Turf Rolls Can Be Used For:

Pet Relief Areas Putting Greens Lawn Games Landscaping

Turf Specs:

Material	PE fiber with thatch	Application	Indoor/Outdoor
Color	Olive/Field Green	Drainage	Yes
Width	7.5' & 15'	Length	Custom (max. 82')
Thickness	Approx 1-1/8"	UV Stable	Yes
Face Weight	Approx. 60oz	Warranty	15 years
Weight	Approx. 0.62lbs per sqft.	Heat & Frost resistant	Yes



Technical Info About SkyWalk Fibergrates

- Fiberglass reinforced plastic structural grating
- 1' Deep X 3/4" Top Mesh Made In The USA
- Corrosion Resistant Lightweight
- Approximate Weight 3 lbs/sqft
- Load Bar Centers 1 1/2"
- Load Bar width 1/4"
- # of Load Bars/Ft. of Width 8
- Load Bearing dead weight 2300 lbs
- ASTM Rated
- Partially recycled fiberglass content