








**skydeck**  
— **usa** —

porcelain paver **product information**



**skydeck usa, LLC**

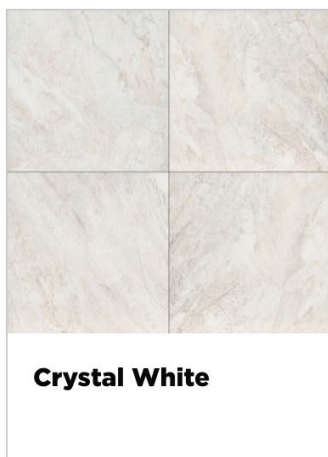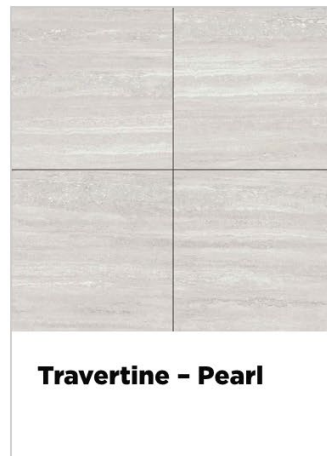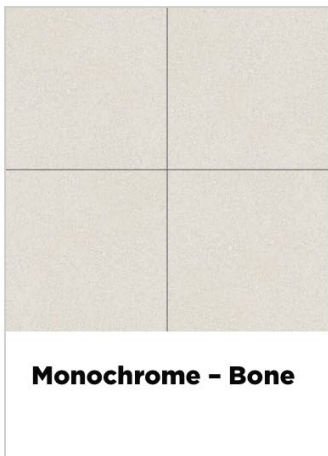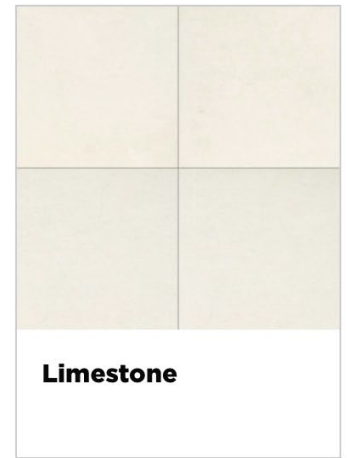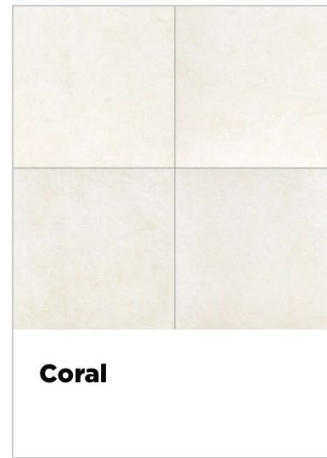

All colors are available in 24" x 24" x 3/4". Some colors are available in 12" x 24", 18" x 36" and 24" x 48".





**Cenere**




**Travertine - Avorio**




**Travertine - Shell**



**Quartzite - Cloud**



**Monochrome - Ash**



**River Stone**



**Travertine - Andes  
Silver**



**Quartzite - Laguna**



**Titan**



**Sandalo**



**Greystone**



**Bluestone**

All colors are available in 24" x 24" x 3/4". Some colors are available in 12" x 24", 18" x 36" and 24" x 48".






**Hyalite**



**Pennstone - True Blue**



**Pennstone - Full Color**



**Terrazzo - Charcoal**



**Terrazzo - Grey Black**



**Charcoal**



**Coke**



**Texwood - Ivory**



**Ash**



**Texwood - Grey**



**Texwood - Brown**



**Tectona**

All colors are available in 24" x 24" x 3/4". Some colors are available in 12" x 24", 18" x 36" and 24" x 48".






**Lapacho**



**Travertine - River**



**Sandy Island**



**Monochrome -  
Basalt**



**Geos**



**Travertine - Crema**




**Travertine -  
Cappuccino**



**Copper Canyon**




**Travertine - Walnut**



**Monochrome -  
Leather**



**Cotto**



**Monochrome -  
Cognac**

All colors are available in 24" x 24" x 3/4". Some colors are available in 12" x 24", 18" x 36" and 24" x 48".



# porcelain paver **technical specifications**



| Characteristic                 | Test Method       | Value*             |
|--------------------------------|-------------------|--------------------|
| Thickness                      |                   | 3/4"               |
| Weight                         |                   | 9 lb/sq.ft         |
| Water Absorption               | ISO 10545-3       | <0.1%              |
| Breaking Strength              | ISO 10545-4       | >2200 lbf          |
| Modulus of Rupture             | ISO 10545-4       | >7000 psi          |
| Static Load Capacity           |                   |                    |
| Center                         | EN 12825          | >1700 lbf          |
| Side Center                    | EN 12825          | >1200 lbf          |
| Diagonal                       | EN 12825          | >1500 lbf          |
| Bending Strength               | EN 1339           | Class 14           |
| Impact Resistance              | ISO 10545-5       | >0.55              |
| Resistance to Abrasion         | ISO 10545-6       | Conforms           |
| Frost Resistant                | ISO 10545-12      | Resistant          |
| Resistant to Thermal Shock     | ISO 10545-9       | Resistant          |
| Resistance to Chemicals        | ISO 10545-13      | UA                 |
| Resistance to Acids & Alkalis  | ISO 10545-14      | Class 5            |
| Fire Resistance                | EN3501-1          | A1-A1 FL           |
| Barefoot Ramp Test             | DIN 51097         | A+B+C              |
| Shod Ramp Test                 | DIN 51130         | R11                |
| Static Coefficient of Friction | ASTM C1028-2007   | >0.6 wet, >0.6 dry |
| Slip Resistance                | DM236/89 B.C.R.A. | >0.40              |

\*Average values - compliant with relevant standard

