



PLAN VIEW

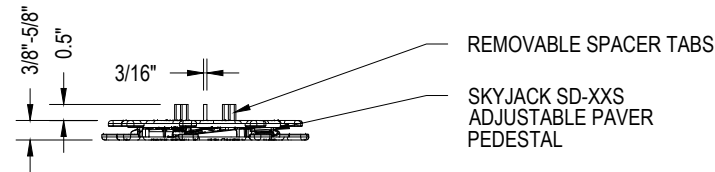

FRONT ELEVATION  
SD-XXS WITH TOP PLATE

FOR SLOPES GREATER THAN 1/4" PER FOOT, ADD  
SD-XL-SLH SELF-LEVELING HEADS TO COMPENSATE  
FOR SLOPES UP TO 7%

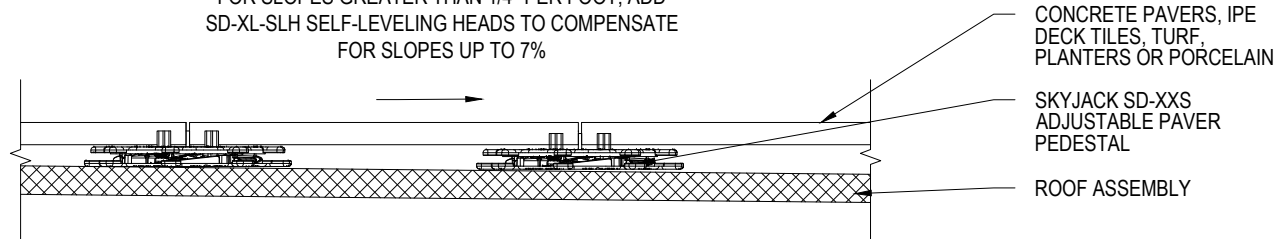

INSTALLATION DETAIL  
TYPICAL PEDESTAL APPLICATION

**SPECIFICATIONS**


MATERIAL	FULLY RECYCLABLE HIGH DENSITY COPOLYMER POLY PROPYLENE (HDCCP)
TEMP. RANGE	-20 - 200 DEGREES FAHRENHEIT
WEIGHT CAPACITY	2,150 LBS PER PEDESTAL

**NOTES:**

- **BOX CONTENTS:** ONE FULLY ASSEMBLED SD-XXS ADJUSTABLE PAVER PEDESTAL WITH 3/16" GAP SPACERS\*. UP TO 125 PCS PER BOX.  
\* 1/8" GAP SPACERS ARE AVAILABLE UPON REQUEST

**ADJUSTABLE PAVER PEDESTAL**

SKYJACK: PEDESTAL SD-XXS (3/8"-5/8")

DWG. NO.	DATE: 6/20/25	
SHEET	BY:	