


SkyWalk™ Porcelain Paver Pedestal System

by Skydeck USA

SKYWALK INTEGRATED PAVER SAFETY BACKING FOR PORCELAIN PAVERS

ONE LAYER. MORE STRENGTH. LESS LABOR.

Factory-applied protection for exterior-grade 2CM porcelain pavers - engineered to simplify installation, reduce job-site complexity, and keep a cracked paver stable until replacement.

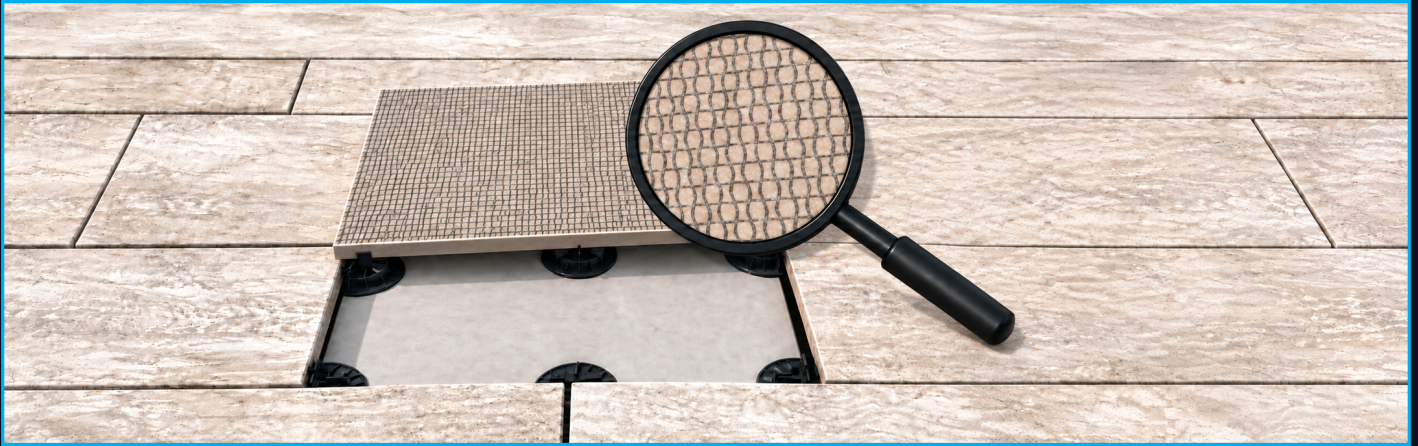

3,902 LB

PRE-CRACK PEAK FORCE

2,293 LB

POST-CRACK PEAK FORCE

50%+

POTENTIAL LABOR SAVINGS

WHY SKYWALK WINS

- ✓ **JOB-SITE READY**
Backing is bonded at the factory - no separate trays, sub-grids, or field-applied adhesive.
- ✓ **CUTS CLEANLY**
Paver and backing cut together with no reported loss of backing performance at cut edges.
- ✓ **LESS TO HANDLE**
Half the system layers means fewer materials to ship, stage, store, level, and cut on site.
- ✓ **ONE LAYER, ONE INSTALL**
Eliminates the second layer that tray systems require, cutting installation steps and complexity.
- ✓ **LOWER PROFILE**
Negligible added thickness helps the finished surface fit beneath low door and threshold conditions.
- ✓ **EASY ACCESS**
Loose-laid pavers remain removable for roof inspections and access to drains, valves, and utilities.

SKYWALK SAFETY BACKING

Factory applied | Single layer | Cuts with paver | No center pedestal
Minimal added thickness | Easy removal | Available on any paver size

**SKYWALK SAFETY BACKING: ONE LAYER.
TRAYS: TWO LAYERS, TWICE THE WORK.**

MAXIMUM STRENGTH. MINIMUM COMPLEXITY.

For pedestal installations over roofing membranes, concrete decks, balconies, joists, or prepared ground layers.

info@skydeckusa.com

www.skydeckusa.com

 skydeck usa, llc